


额定载荷 Rated load	50, 100, 150, 200, 250, 300, 500kg, 1t, 2t
精度等级 Accuracy class	0.03
灵敏度 Sensitivity	2.0±0.2mV/V
线性误差 Non-linearity	±0.03%F.S
滞后误差 Hysteresis error	±0.03%F.S
蠕变(30分钟) Creep(30min)	±0.02%F.S
零点温度影响 TC ZERO	±0.02%F.S/10°C
灵敏度温度影响 TC SPAN	±0.02%F.S/10°C
输入阻抗 Input resistance	400±20Ω
输出阻抗 Output resistance	352±5Ω
绝缘电阻 Insulation resistance	≥5000 MΩ
额定温度 Nominal Temp Range	-10~+40°C
工作温度范围 Service Temp Range	-30~+70°C
安全负载 Safe load limit	150%F.S
破坏负载 Breaking load	200%F.S
额定激励电压 Nominal of range excitation	10~12 V DC
密封等级 Protection Class	IP65
材料 Material	合金钢 Alloy steel
电缆 Cable	Length=3m, Diameter:φ5
最大秤台尺寸 Max. platform size	400x400mm(50~200kg) 600x800mm(250~750kg) 1000x1000mm(1~2t)

接线图Wiring Schematic Diagram

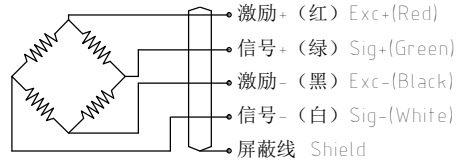

额定载荷	A	B	C	D	E	F
50~200kg	156	44	24	75	50	M12
250~750kg	146	60	36	95	70	M12
1t~2t	176	76	46	125	95	M16

						宁波柯力传感科技股份有限公司		
标记处数分区更改文件号						ILGB50kg~2t安装图		
设计	15.5.25	标准化	签名	年月日	图样标记		重量	比例
校对		会签			A			
审核		审定			共张		第张	
工艺		批准			KL/JT-ILGB50kg~2t. 0A			